


RoHS  
Compliance

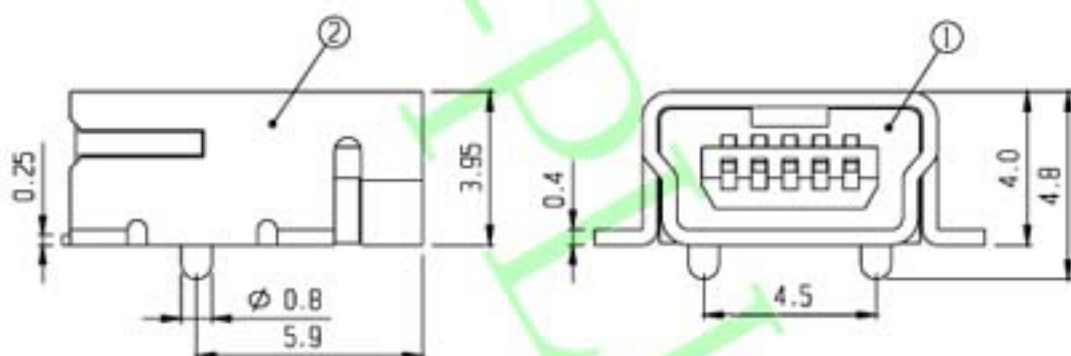

NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS
3	TERMINAL	P B S	5	Au&Ag PLATED					
1	FRAME	NYLON 46	1		2	SHELL	P B S	1	Ni PLATED

ISSUED

SPECIFICATION

TITLE: USB CONNECTOR (SMD)

RATING: DC 9V 1A  
 CONTACT RESISTANCE: 50mΩ Max.  
 INSULATION RESISTANCE: 100MΩ at 500V DC  
 WITHSTAND VOLTAGE: AC 1000V for 1 minute.  
 OPERATION FORCE: REFER ATTACH SPECIFICATION  
 SWITCHING LIFE: 5,000 cycles min.

MODEL NO: USB-502-M

TOLERANCE UNIT: MM DWN.  
 UP TO 1.0:±0.1 SCALE: 6:1  
 1.0 TO 10.0:±0.2 VERSION: 03  
 OVER 10.0:±0.3 DRWG NO: APPD.

BY:   
 DATE: 31-AUG-2007

SEE-PLUS INDUSTRIAL LTD.

