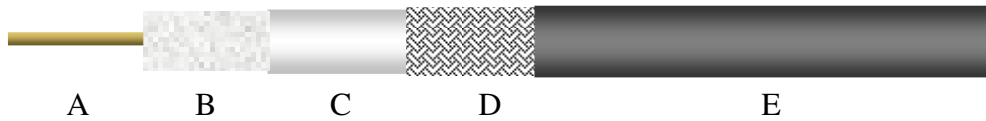


DESCRIPTION

COAXIAL CABLE - 75 OHM

RG-11**CONSTRUCTION DATA**

A) Inner conductor of copper clad steel (CCS)	1.63 mm
B) Dielectric of physical foam polyethylene	7.11 mm
Outer conductors:	
C) Aluminum laminated foil	
D) Braid of aluminum wires	60% coverage
E) Outer sheath of PVC	10.03 mm

Minimum bending radius indoor/outdoor : 50/100 mm

ELECTRICAL DATA

Characteristic impedance	:	75 +/- 2 ohms
Capacitance	:	53.2 pF/m +/- 2
Velocity ratio	:	83%
Attenuation (at 20°C)	:	dB/100 m

Frequency	Atten. (+/- 5%)	Frequency	Atten. (+/- 5%)
5 MHz	1.25	400 MHz	8.53
50 MHz	3.00	600 MHz	10.43
100 MHz	4.25	800 MHz	12.36
200 MHz	6.07	860 MHz	13.01
230 MHz	6.45	1000 MHz	14.27

Inner conductor resistance: 39.7 ohm/km

S.R.L.: 5-300 MHz : 30 dB

Outer conductor resistance: 30 ohm/km

300-1000 MHz: 25 dB



1-3, 17/F., Wang Lung Ind Bldg., 48-56 Wang Lung St., Tsuen Wan, N.T. HK

Tel: 852-24088812 Fax: 852-24073122