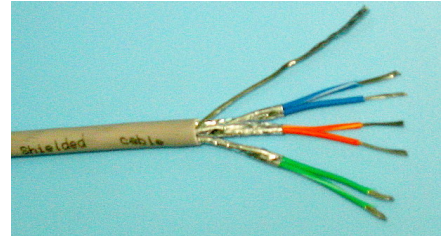


**22 Gage**

Stranded Conductors (7/AWG30)

**Polyethylene Insulated, Paired, Individually Shielded**
**Part Number : 8777**

**Product Description:**

Tinned copper conductor, polyethylene insulated, twisted pairs

Each pair individually shielded with aluminum-polyester foil

24 AWG stranded tinned copper drain wire

PVC jacket (Color: Grey)

No. of Pairs	:	3
Standard Lengths	:	1000ft/305m
Nominal O.D.	:	5.8mm
Nominal Impedance	:	50 ohm
Nom Velocity of Prop.	:	66%
Nominal D.C.R.		
Conductor	:	49.8 ohm/km
Shield	:	36.2 ohm/km
Nominal Capacitance	:	105 pF/m
<i>(between conductors)</i>		
Nominal Capacitance	:	195 pF/m
<i>(between one conductor and other conductors connected to Shield)</i>		

*Specifications given are for guidance only and may be subject to change without prior notice*

Room 1-3, 17/F., Wang Lung Industrial Building, 48-56 Wang Lung Street, Tsuen Wan, N.T. Hong Kong.

 Tel: 852-24088812 Fax: 852-24073122 Web site: [www.cabletech.com.hk](http://www.cabletech.com.hk) Email: [sales@cabletech.com.hk](mailto:sales@cabletech.com.hk)