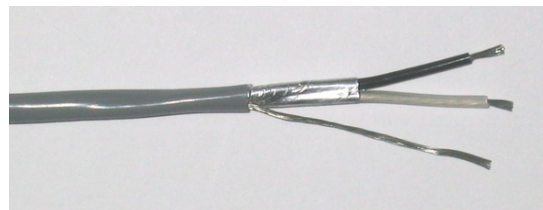


18 Gage

Stranded Conductors (16/AWG30)

Polyethylene Insulated
Part Number : 8760

Construction:

Tinned copper conductors, polyethylene insulated, twisted pair.

100% shield coverage (aluminum-polyester foil)

20 AWG stranded tinned copper drain wire

PVC jacket (Grey)

No. of Pairs	:	1
Insulation Thickness	:	0.48 mm
Jacket Thickness	:	0.71 mm
Nominal O.D.	:	5.64 mm
Nominal Conductor DC Resistance at 20°C	:	6.5 ohm/1000 ft
Nominal Capacitance (between conductors)	:	79 pF/m
Nominal Capacitance (between one conductor and other conductor connected to Shield)	:	144 pF/m

Specifications given are for guidance only and may be subject to change without prior notice

Room 1-3, 17/F., Wang Lung Industrial Building, 48-56 Wang Lung Street, Tsuen Wan, N.T. Hong Kong.

Tel: 852-24088812 Fax: 852-24073122 Web site: www.cabletech.com.hk Email: sales@cabletech.com.hk