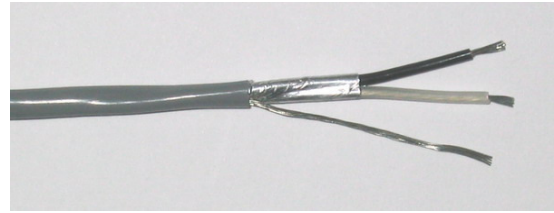


22 Gage

Stranded Conductors (7/AWG30)

Polyethylene Insulated**Part Number : 8761****Construction:**

Tinned copper conductor, polyethylene insulated, twisted pair.

100% shield coverage (aluminum-polyester foil)

22 AWG stranded tinned copper drain wire

PVC jacket (Colour: Black, Grey, White)

No. of Pairs	:	1
Insulation Thickness	:	0.41mm
Jacket Thickness	:	0.64mm
Nominal O.D.	:	4.45mm
Nominal Impedance	:	64 Ohms
Nominal Capacitance <i>(between conductors)</i>	:	77 pF/m
Nominal Capacitance <i>(between one conductor and other conductors connected to Shield)</i>	:	151 pF/m

Specifications given are for guidance only and may be subject to change without prior notice

Room 1-3, 17/F., Wang Lung Industrial Building, 48-56 Wang Lung Street, Tsuen Wan, N.T. Hong Kong.

Tel: 852-24088812 Fax: 852-24073122 Web site: www.cabletech.com.hk Email: sales@cabletech.com.hk